



Dow Corning[®] 3363 Insulating Glass Sealant

FEATURES & BENEFITS

- Economical joint sizes in high strength IG applications
- High design strength (0.21 MPa) allowing joint size reduction up to 30%
- Enhanced productivity with reduced joint dimensions
- European Technical Approval (ETA13/0359)
- Suitable for gas-filled triple glazed units and gas-filled double glazed units.
- Structural capability as secondary sealant for insulating glass in structural glazing applications
- Outstanding adhesion to a wide range of substrates including coated and reflective glasses, aluminium and steel spacers, and a variety of plastics
- Meets EN 1279 part 4 and 6 and EN 13022
- Tested according to EN 15434
- Low water absorption
- Excellent temperature stability: -50°C to 150°C
- Non-corrosive cure
- Fast curing time
- Outstanding resistance to ozone and ultraviolet (UV) radiation
- High modulus which limits the stress on the primary sealant and makes it particularly suited for gas-filled insulating glass units

Two-part silicone sealant with high strength for use as a secondary seal in insulating glass units.

APPLICATIONS

- *Dow Corning*[®] 3363 Insulating Glass Sealant is a high strength secondary two-part silicone sealant specifically designed for high strength applications, where conventional sealants with lower strength would lead to increased joint sizes. It enables economical joint sizes in highly demanding insulating glass (IG) applications such as: high wind in tall buildings, hurricane loads, cold-bent glass or high impact loads such as bomb blast. Smaller joint dimensions can be filled faster and therefore lead to productivity enhancements.
- *Dow Corning* 3363 Insulating Glass Sealant is ideal as a secondary sealant for triple and double glazed units and meets EN 1279 requirements for gas-filled IG.
- *Dow Corning* 3363 Insulating Glass Sealant can be used in IG applications for structurally glazed facades. It is UV resistant, provides long-term durability and excellent adhesion to glass and IG spacers.

TYPICAL PROPERTIES

Specification Writers: These values are not intended for use in preparing specifications. Please contact your local Dow Corning sales office or your Global Dow Corning Connection before writing specifications on this product.

Test*	Property	Unit	Result
<i>Dow Corning</i>[®] 3363 Base: as supplied			
	Color and consistency		White, viscous paste
	Specific gravity		1.38
<i>Dow Corning</i>[®] 3363 Curing agent: as supplied			
	Color and consistency		Thick black paste
	Specific gravity		1.05
	Viscosity (60s ⁻¹)	Pa.s	7.5
As mixed			
	Color and consistency		Black non-slump paste
	Working time (25°C, 50% R.H.)	minutes	5-10
	Snap time (25°C, 50% R.H.)	minutes	10-30
	Specific gravity		1.33
	Corrosiveness		Non-corrosive
ISO 8339	Tensile strength	MPa	1.5

DESCRIPTION

Dow Corning 3363 Insulating Glass Sealant is a two-component, neutral curing silicone formulation for insulating glass applications.

TECHNICAL SPECIFICATIONS AND STANDARDS

Dow Corning 3363 Insulating Glass Sealant is suitable as secondary seal in gas-filled insulating glass units and meets the requirements according to EN 1279 in an IG system. It is suitable for gas-filled triple and double glazed IG. As valid for any other technology, a proper application and fabrication of the insulating glass unit is required.

Dow Corning 3363 Insulating Glass Sealant is CE-marked according to ETAG002. The product also meets requirements according to EN 1279 parts 4 and 6.

SNJF Vi-VEC



HOW TO USE

Mixing and dispensing instructions

Dow Corning 3363 Insulating Glass Sealant should be mixed in a ratio of 10:1 base to curing agent by weight. At this mix ratio, the sealant typically exhibits a working time of 5–10 minutes and allows units to be handled within two hours. Slight variations in mixing ratio can be tolerated, but these should not exceed 11:1 to 9:1 by weight to ensure minimum properties are obtained.

The sealant is compatible with most of *Dow Corning*[®] brand Neutral Curing Sealants. Please contact our Technical Services Department for more information.

To achieve the best mechanical properties of *Dow Corning* 3363 Insulating Glass Sealant, it is recommended that the base and curing

TYPICAL PROPERTIES (continued)

Test*	Property	Unit	Result
EN 1279-6	Durometer hardness, Shore A		60
ETAG 002	Design stress in tension	MPa	0.21
	Design stress in static shear	MPa	0.011
	Elastic modulus in tension or compression	MPa	4.8
EN 1279-4	Water vapor permeability (2.0 mm film)	g/m ² /24h	18
EN 1279-4	Gas permeability	g/(m ² h)	0.46

*ISO: International Standardization Organization

EN: European Norm

ETAG: European Technical Agreement Guidelines

agent are thoroughly mixed using an airless mixing system found on most existing commercially available two-part silicone dispensing machines.

Equipment cleaning

When not being used it is recommended that the dispensing equipment be purged either with the uncatalyzed base, or flushed with a suitable solvent such as *Dow Corning*[®] 3522 Concentrated Cleaning Solvent. If cured sealant has built up inside the equipment it is recommended to flush the equipment for the appropriate time with *Dow Corning* 3522 Concentrated Cleaning Solvent. This solvent dissolves cured silicone sealant and provides optimum cleaning performance.

HANDLING

PRECAUTIONS

PRODUCT SAFETY INFORMATION REQUIRED FOR SAFE USE IS NOT INCLUDED IN THIS DOCUMENT. BEFORE HANDLING, READ PRODUCT AND SAFETY DATA SHEETS AND CONTAINER LABELS FOR SAFE USE, PHYSICAL AND HEALTH HAZARD INFORMATION. THE SAFETY DATA SHEET IS AVAILABLE ON THE DOW CORNING WEBSITE AT DOWCORNING.COM, OR FROM YOUR DOW CORNING SALES APPLICATION ENGINEER, OR DISTRIBUTOR, OR BY CALLING

DOW CORNING CUSTOMER SERVICE.

USABLE LIFE AND STORAGE

When stored at or below 30°C, *Dow Corning* 3363 Insulating Glass Curing Agent has a usable life of 14 months from the date of production.

When stored at or below 30°C, *Dow Corning* 3363 Insulating Glass Base has a usable life of 14 months from the date of production.

PACKAGING INFORMATION

Lot matching of Base and Curing Agent is not required. *Dow Corning* 3363 Insulating Glass Base is available in 250 kg drums. *Dow Corning*[®] 3363 Insulating Glass Catalyst is available in 25 kg pails.

LIMITATIONS

The sealant cannot be used for structural glazing of glass units onto a metal frame. *Dow Corning*[®] 993 Structural Glazing Sealant is the recommended product for that application.

Please contact Dow Corning to get the proper glazing recommendations when using coated glass.

This product is neither tested nor represented as suitable for medical or pharmaceutical uses.

Dow Corning is a registered trademark of Dow Corning Corporation. The Corning portion of the Dow Corning trademark is a trademark of Corning, Incorporated, used under license.

We help you invent the future is a trademark of Dow Corning Corporation.

XIAMETER is a registered trademark of Dow Corning Corporation.

© 2013–2017 Dow Corning Corporation, a wholly owned subsidiary of The Dow Chemical Company. All rights reserved.

HEALTH AND ENVIRONMENTAL INFORMATION

To support customers in their product safety needs, Dow Corning has an extensive Product Stewardship organization and a team of Product Safety and Regulatory Compliance (PS&RC) specialists available in each area.

For further information, please see our website, dowcorning.com or consult your local Dow Corning representative.

LIMITED WARRANTY INFORMATION – PLEASE READ CAREFULLY

The information contained herein is offered in good faith and is believed to be accurate. However, because conditions and methods of use of our products are beyond our control, this information should not be used in substitution for customer's tests to ensure that our products are safe, effective, and fully satisfactory for the intended end use. Suggestions of use shall not be taken as inducements to infringe any patent.

Dow Corning's sole warranty is that our products will meet the sales specifications in effect at the time of shipment.

Your exclusive remedy for breach of such warranty is limited to refund of purchase price or replacement of any product shown to be other than as warranted.


TO THE FULLEST EXTENT PERMITTED BY APPLICABLE LAW, DOW CORNING SPECIFICALLY DISCLAIMS ANY OTHER EXPRESS OR IMPLIED WARRANTY OF FITNESS FOR A PARTICULAR PURPOSE OR MERCHANTABILITY.

DOW CORNING DISCLAIMS LIABILITY FOR ANY INCIDENTAL OR CONSEQUENTIAL DAMAGES.

We help you invent the future.™

dowcorning.com

Figure 1: Typical section of a dual sealed insulating glass unit.

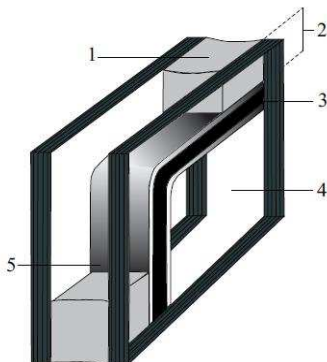

Legend

1. Secondary seal (*Dow Corning 3363* Insulating Glass Sealant)
2. Secondary seal - sealant depth
3. Primary seal – Polyisobutylene
4. Glass
5. Spacer bar